

# Gortiflex® CTH Stock Convoluted Tubing

## Style CTH Protective Covers and Flexible Connections


**Elastomer protective covers available in six stock sizes with variable collar diameters.**

Gortiflex® CTH units can be used for most light duty environments or when an aesthetic cover is required for protection from dust, grit, oil, etc.

Gortiflex® CTH units are manufactured of .030 Hypalon Elastomer and are available in six stock sizes ranging from 3/4" I.D. to 2" I.D. in both 12" and 24" lengths. Inside flanges on both ends of the units accept a snap-in collar to achieve the desired connecting I.D. By stocking various snap-in collar I.D.'s, many different sizes can be accommodated in a stock bellows. Hypalon material has excellent ozone, abrasion and oil resistance. Temperature range is from -40° F to +280° F.


**Snap-in Collars** are 3/4" long and are made of black polyurethane.

**G208 Clamps** are stocked in any size required. Clamp band width is 1/2".

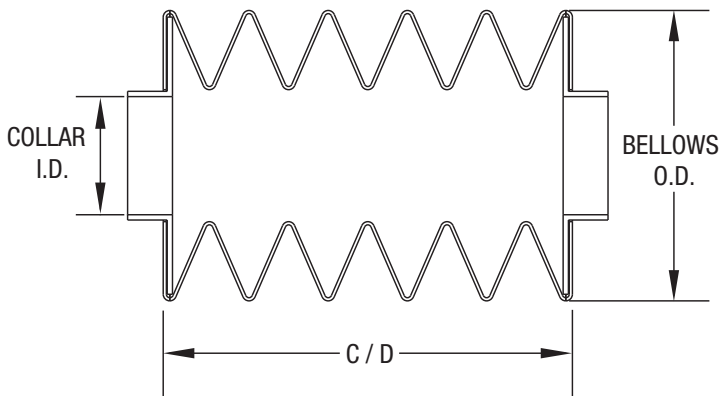

Style Number	Bellows Inside Diameter	Bellows Outside Diameter	C Extended Length	D Retracted Length	Snap-In Collar Sizes Available (I.D.'s)
CTH-.75-12	3/4"	1 5/8"	12"	1 7/8"	1/4", 1/2", 3/4" & 1"
CTH-.75-24	3/4"	1 5/8"	24"	3 3/4"	1/4", 1/2", 3/4" & 1"
CTH-1.375-12	1 3/8"	2 1/2"	12"	1 3/8"	1/2", 3/4", 1", 1 1/4", 1 1/2" & 1 3/4"
CTH-1.375-24	1 3/8"	2 1/2"	24"	2 3/4"	1/2", 3/4", 1", 1 1/4", 1 1/2" & 1 3/4"
CTH-2-12	2"	3 1/4"	12"	1"	1", 1 1/4", 1 1/2", 1 3/4", 2" & 2 1/4"
CTH-2-24	2"	3 1/4"	24"	2"	1", 1 1/4", 1 1/2", 1 3/4", 2" & 2 1/4"

# Gortiflex® Stock Convuluted Tubing

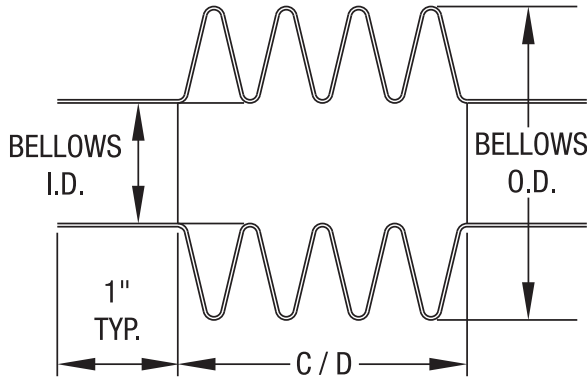


C208 Clamp (1/2" I.D. Minimum)

## Specifications

Style Number	CT-1	CT-1.5	CT-2	CT-2.5	CT-3	CT-3.5	CT-4	CT-4.5	CT-5	CT-6	CT-7	CT-8	CT-10
Inside Diameter	1"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	6"	7"	8"	10"
Outside Diameter	1 3/4"	2 3/8"	3"	3 1/2"	4 1/4"	5"	5 1/2"	6"	6 3/4"	8"	9"	10"	12"
Extended Length C	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"
Retracted Length D	5 1/4"	4 1/2"	4"	4"	3 1/4"	3"	3"	3"	2 1/2"	2 1/4"	2 1/4"	2 1/4"	2 1/4"
Material	Neoprene/Nylon .050 - .060 Gauge												
Operating Temperature	-45°F to 220°F												

Style Number	I. D.	O. D.	C Ext. Length	D Retracted Length	Snap-In Collar Sizes Available (I.D.'s)
CTH-.75-12	3/4"	1 5/8"	12"	1 7/8"	1/4", 1/2", 3/4" & 1"
CTH-.75-24	3/4"	1 5/8"	24"	3 3/4"	1/4", 1/2", 3/4" & 1"
CTH-1.375-12	1 3/8"	2 1/2"	12"	1 3/8"	1/2", 3/4", 1", 1 1/4", 1 1/2" & 1 3/4"
CTH-1.375-24	1 3/8"	2 1/2"	24"	2 3/4"	1/2", 3/4", 1", 1 1/4", 1 1/2" & 1 3/4"
CTH-2-12	2"	3 1/4"	12"	1"	1", 1 1/4", 1 1/2", 1 3/4", 2" & 2 1/4"
CTH-2-24	2"	3 1/4"	24"	2"	1", 1 1/4", 1 1/2", 1 3/4", 2" & 2 1/4"

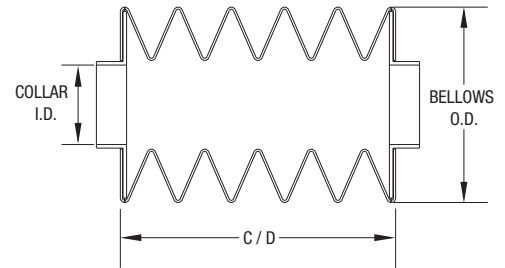

## How to Order Gortiflex® Stock Convuluted Tubing

Date: \_\_\_\_\_ For Quotation Only: \_\_\_\_\_ Address: \_\_\_\_\_

Order Number: \_\_\_\_\_

Company Name: \_\_\_\_\_ City: \_\_\_\_\_ State/Prov. \_\_\_\_\_

Contact: \_\_\_\_\_ Country: \_\_\_\_\_ Zip/Postal Code: \_\_\_\_\_

Quantity of covers needed: \_\_\_\_\_ Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_

E-Mail: \_\_\_\_\_

### 1. Style Number\* (\* denotes a required field)

- Bellows For\*:**  New Design  Replace Existing Cover
- CT**  CT-1  CT-1.5  CT-2  CT-2.5  
 CT-3  CT-3.5  CT-4  CT-4.5  
 CT-5  CT-6  CT-7  CT-8  
 CT-10
- CTH**  CTH-.75-12  CTH-.75-24  CTH-1.375-12  
 CTH-1.375-24  CTH-2-12  CTH-2-24

### 2. Snap-In Collar Dimensions (CTH Style Only)

End #1 Inside Diameter (ID): \_\_\_\_\_ End #2 Inside Diameter (ID): \_\_\_\_\_

### 3. Clamps

- C208 Clamp (.5" ID Minimum)  
*Note: C208 clamps are stocked in any size required. Clamp band is .5" wide.*

▼ Please fax or e-mail the completed form to the number/address shown.